



Product Specification

Model	Diameter (mm)	Height (mm)	Capacity (L)	Immersion		House size		Domestic Connections	Max mains pressure (Bar)	Output	
				Direct	Indirect	Baths	Showers			Hot Water	Heating
150	550	1080	150	1 x 3kW	1 x 3kW	1	1	22 mm	2	Yes	Yes
180	550	1280	180	1 x 3kW and 1 Plug	1 x 3kW	1	2	22 mm	2	Yes	Yes
210	550	1480	210	1 x 3kW and 1 Plug	1 x 3kW	1/2	2	22 mm	2	Yes	Yes
250	550	1680	250	1 x 3kW and 1 Plug	1 x 3kW and 1 Plug	2	2/3	22 mm	2	Yes	Yes
300	550	1880	300	1 x 3kW and 1 Plug	1 x 3kW and 1 Plug	2/3	3	22 mm	2	Yes	Yes

- Options:**
- All models are available with 28 mm Domestic pipework for high flow demand
 - All models are available as pressurised/unvented (contact for details)
 - All models are available with extra tappings (contact for details)
 - Bespoke sizes available on request

NOTE: Gravity feed required for stove back boiler

6





5

4

3

2

1

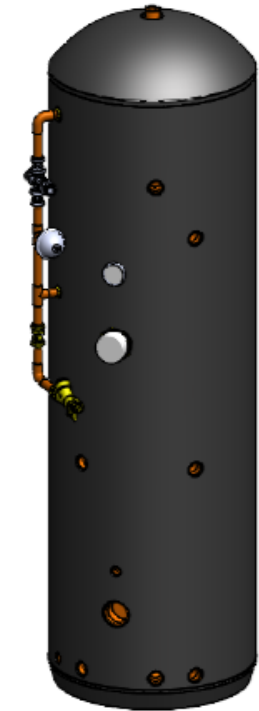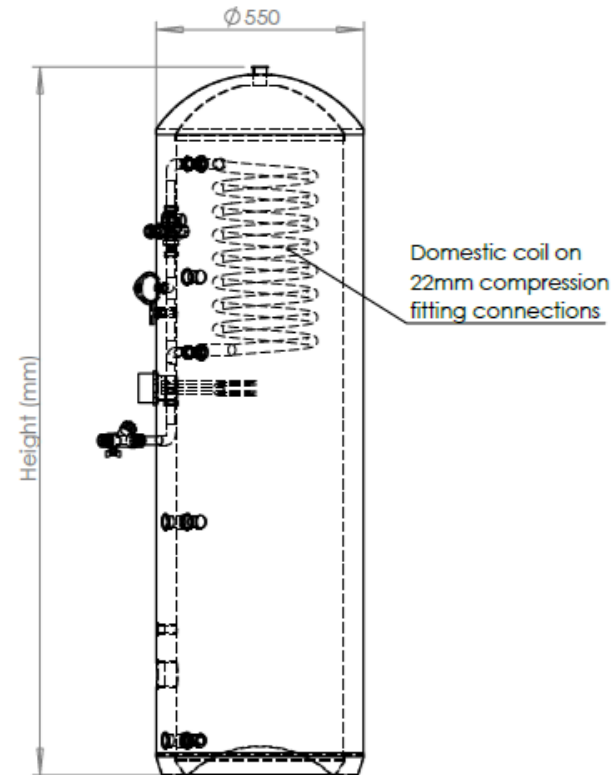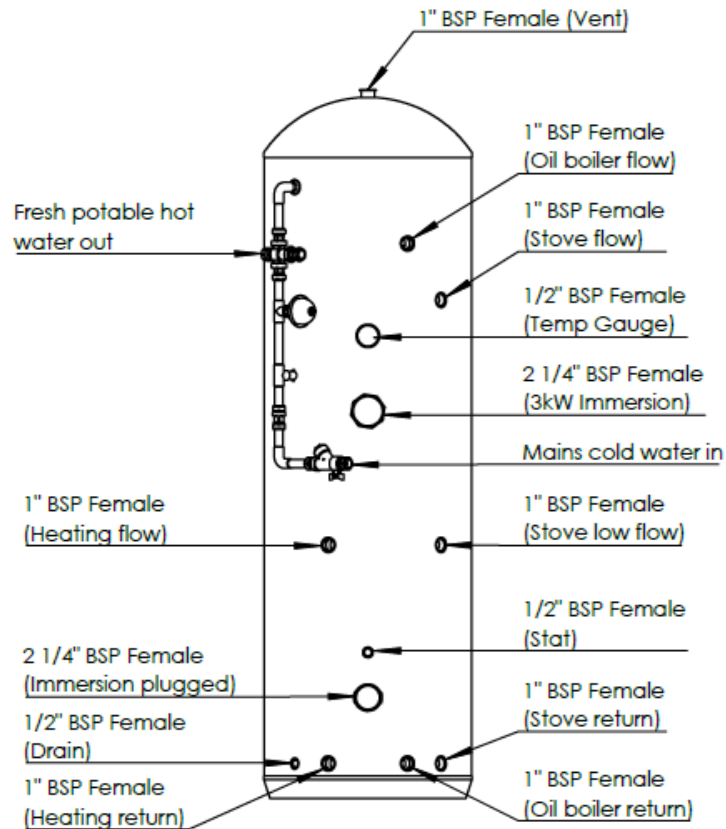

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU Foam Injected inside steel case

Suitable for:

- Oil boiler
- Stove/back boiler

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

SCALE:1:20

copper
industries

Maxipod_Direct

A4

IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

SHEET 1 OF 1

6

5

4

3

2




1

D

C

B

A

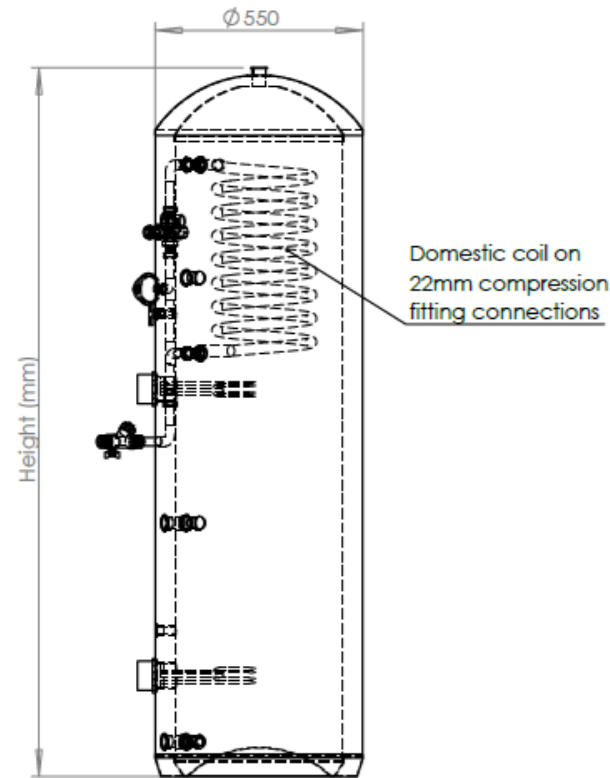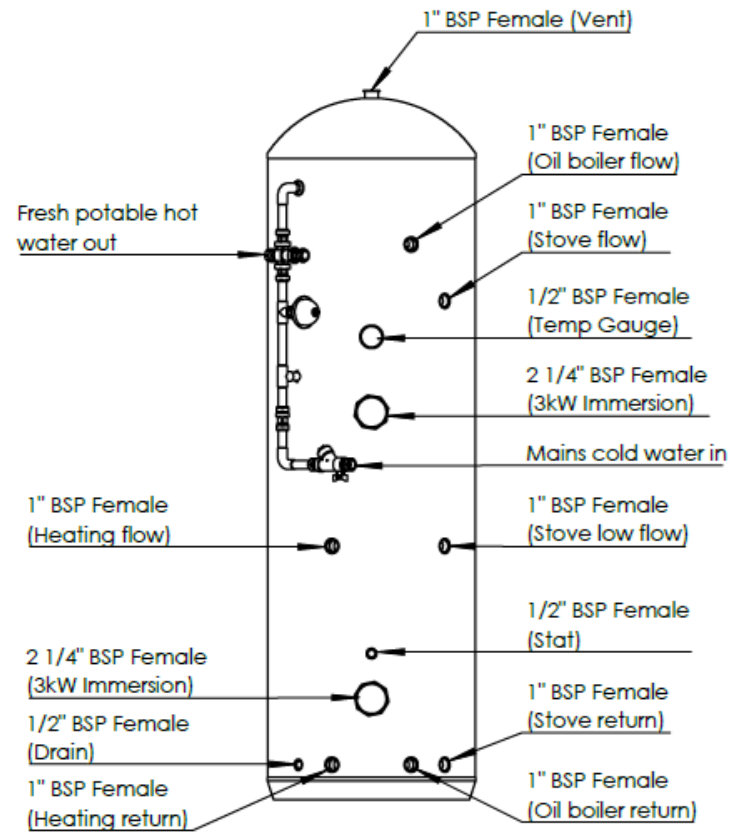

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU Foam Injected inside steel case

Suitable for:

- Oil boiler
- Stove/back boiler
- Solar PV

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

SCALE: 1:20

copper
industries

Maxipod_Solar PV

A4

IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

SHEET 1 OF 1

6




5

4

3

2

1

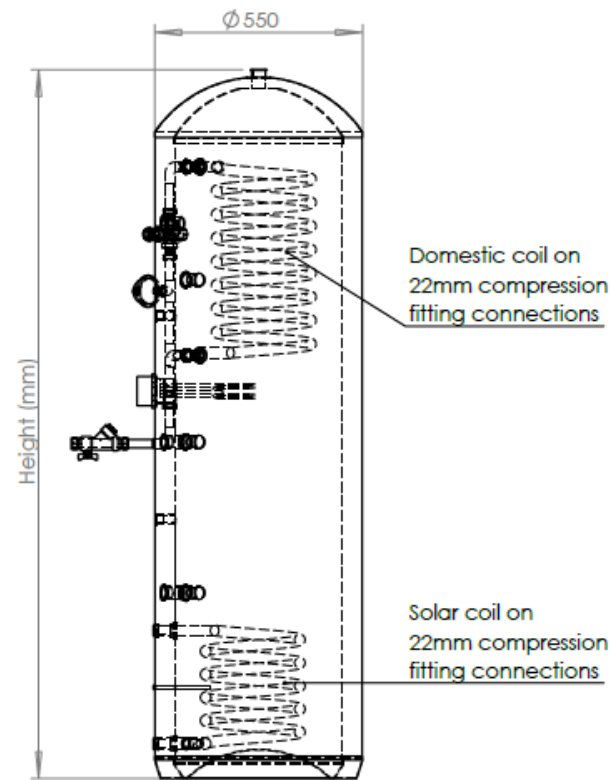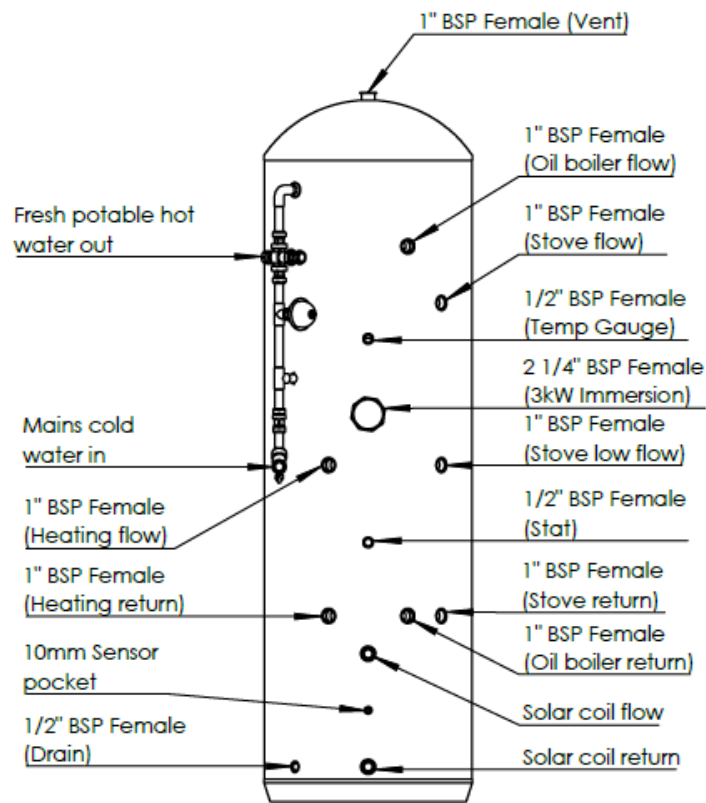

Suitable for:

- Oil boiler
- Stove/back boiler
- Solar PV (250L and above)
- Solar Thermal

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU Foam Injected inside steel case

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

SCALE:1:20

copper
industries

Maxipod_Solar Thermal

A4




IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

SHEET 1 OF 1

6 5 4 3 2 1

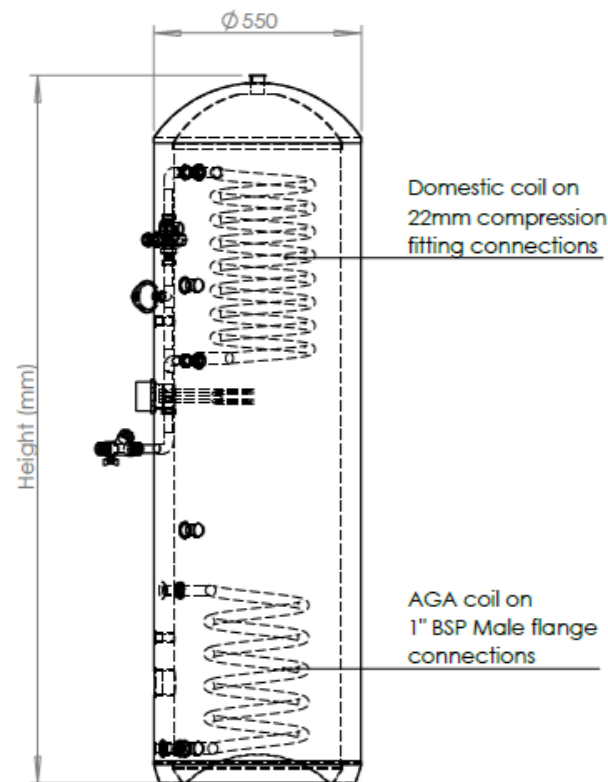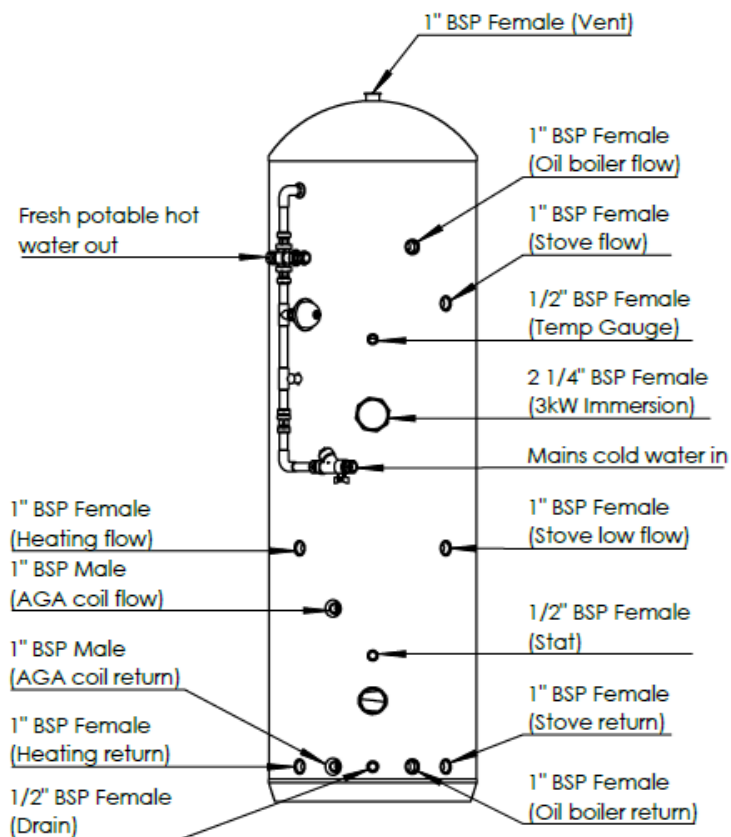

Suitable for:

- Oil boiler
- Stove/back boiler
- Solar PV (250L and above)
- AGA

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU Foam Injected inside steel case

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

SCALE:1:20

copper
industries

Maxipod_AGA Coil

A4

IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

SHEET 1 OF 1

6

5

4

3

2




1

D

C

B

A

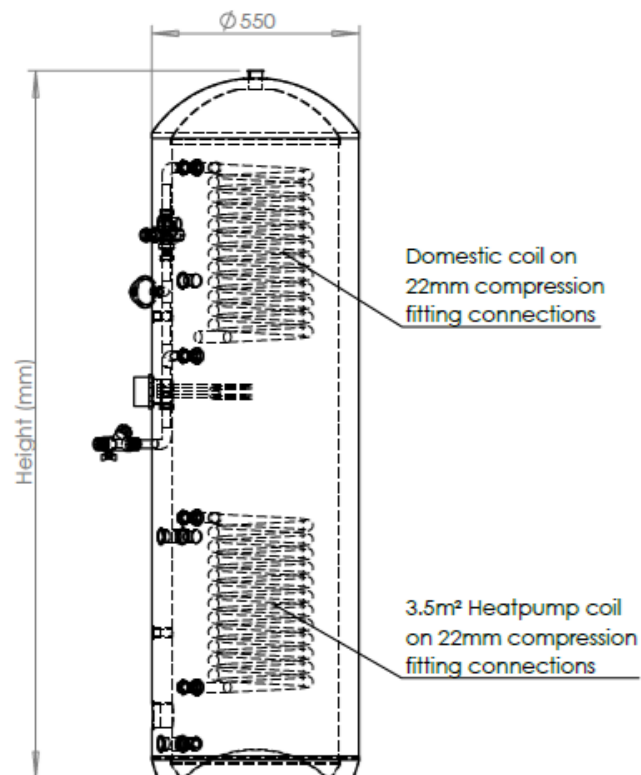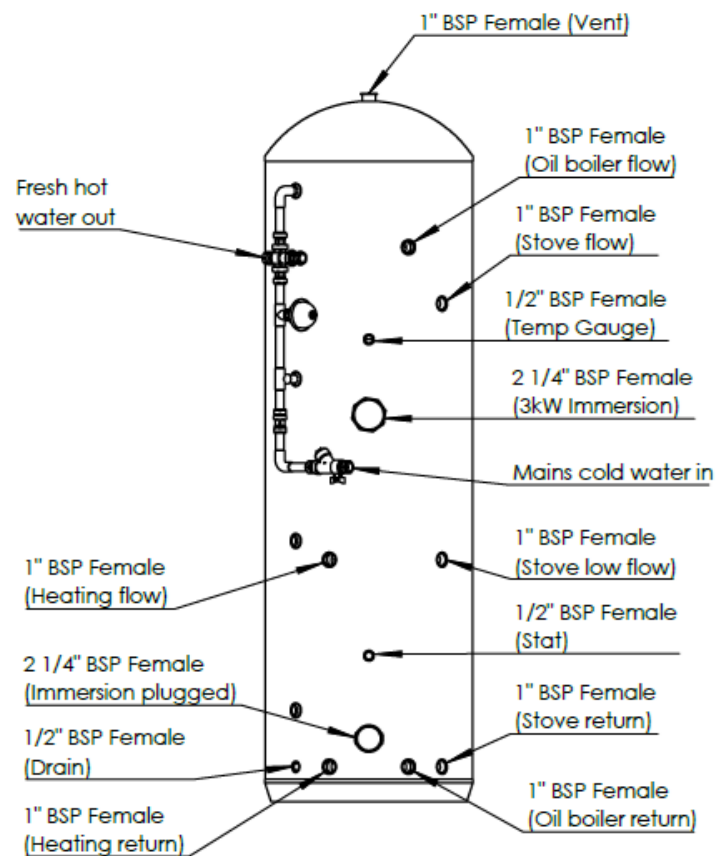

Suitable for:

- Oil boiler
- Stove/back boiler
- Solar PV (250L and above)
- Heatpump

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU Foam Injected inside steel case

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

SCALE: 1:20

copper
industries

Maxipod_Heatpump

A4

SHEET 1 OF 1

IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

6

5

4

3

2


1

D

C



B

A

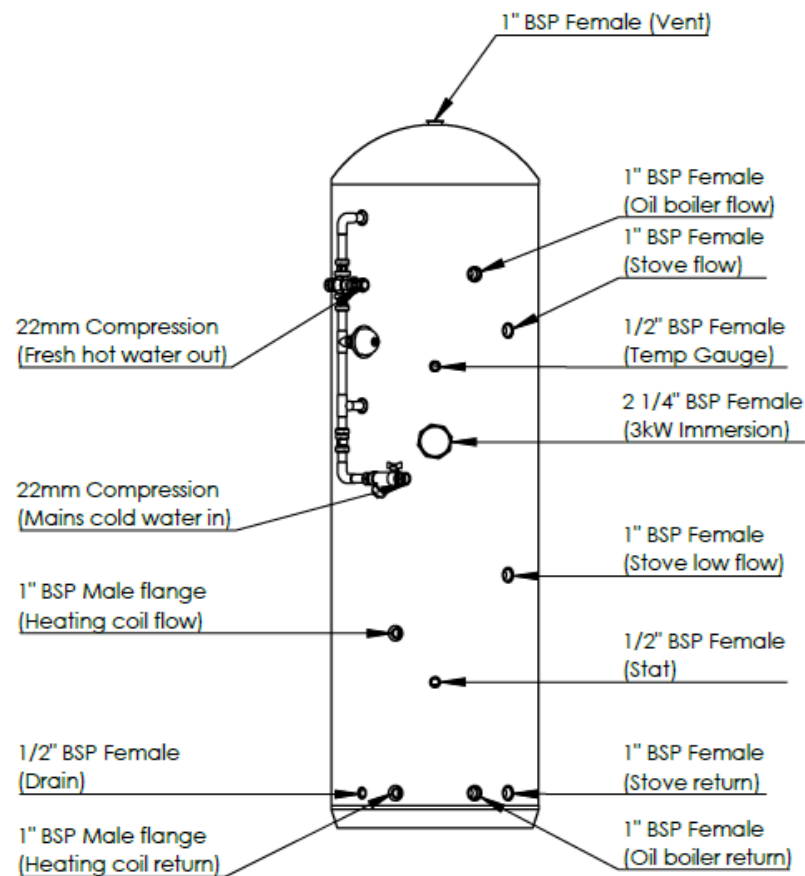

Domestic coil on
22mm compression
fitting connections

Heating coil on
1" BSP male flange
connections

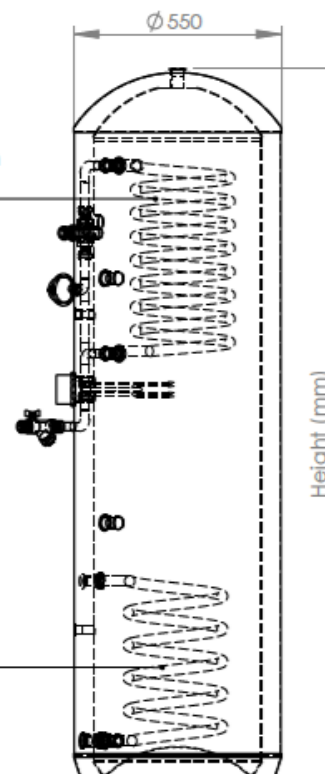

Suitable for:

- Oil boiler
- Stove/back boiler
- Solar PV (250L and above)
- Pressurised heating

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU foam injected inside steel case

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

SCALE: 1:20

copper
industries

Maxipod_Indirect Heating

A4

IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

SHEET 1 OF 1

6




5

4

3

2

1

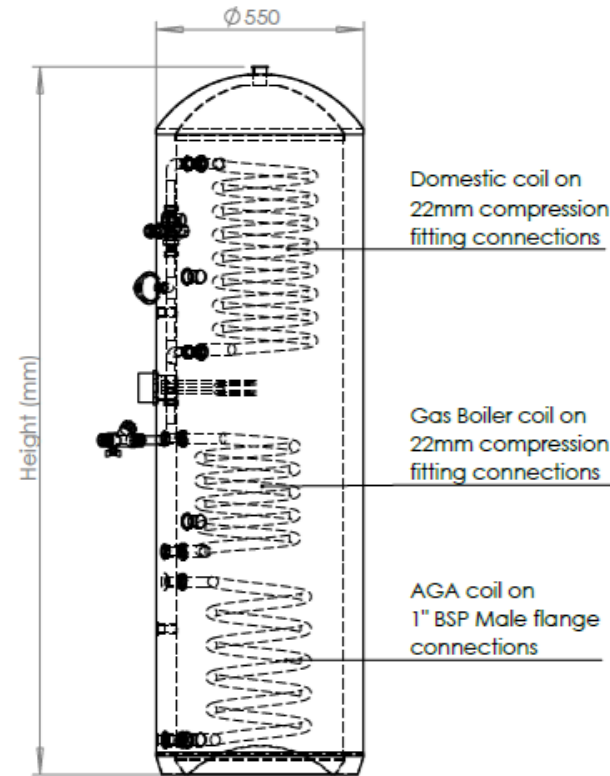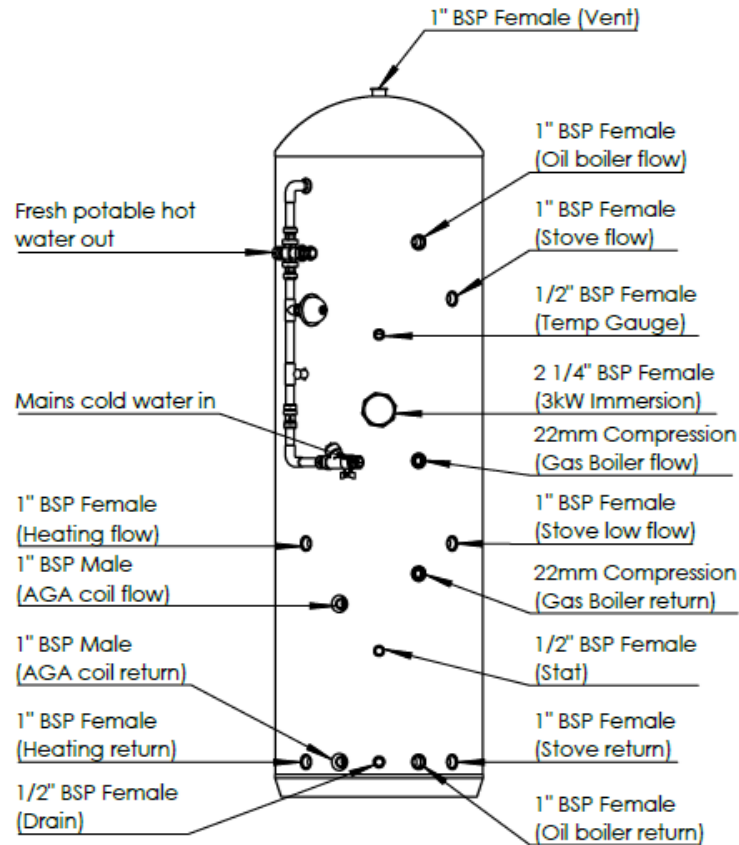

Suitable for:

- Oil boiler
- Stove/back boiler
- Solar PV (250L and above)
- AGA
- Gas or pressurised boiler

Cylinder Material: Copper (BS 2870 C106)

Casing Material: Mild Steel

Type: Open Vented

Grade: 2

Insulation: 50 mm PU Foam Injected inside steel case

DESIGNED BY:

COPPER INDUSTRIES

DESIGN PROTECTED BY
COPYRIGHT

MATERIAL:

WEIGHT:

DWG NO.

Maxipod_AGA and Gas Boiler

SCALE: 1:20

SHEET 1 OF 1

A4

IN THE INTERESTS OF CONTINUED IMPROVEMENT, THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE SPECIFICATIONS AND DESIGN WITHOUT DUE NOTICE

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS.

ALL DIMENSIONS ARE SUBJECT TO A
MANUFACTURING TOLERANCE OF
+/- 15 MM UNLESS OTHERWISE STATED

